

Ø600 JESMIG BRØNDDÆKSEL

T2



T2-50, T2-70, T2-135-70 og T2-135-105

Tekniske data	T2-50	T2-70	T2-135-70	T2-135-105
Brøndstørrelse	Ø600 mm	Ø600 mm	Ø600 mm	Ø600 mm
Ydre karm mål Y	660 x 660 mm	660 x 660 mm	660 x 660 mm	660 x 660 mm
Ydre dæksel mål M	560 x 560 mm	560 x 560 mm	560 x 560 mm	560 x 560 mm
Lysåbning L	500 x 500 mm	500 x 500 mm	500 x 500 mm	500 x 500 mm
Belægningshøjde	10-59 mm	60-79 mm	60-79 mm	60-105 mm
Karm højde H	59 mm	79 mm	135 mm	135 mm
Max belastning m/sten	A 50 / 5 ton	A 50 / 5 ton	A 50 / 5 ton	A 50 / 5 ton
Brønddæksel vægt u/belægning	12 kg.	14 kg.	14 kg.	15 kg.

Varenr.	DB nr.	Beskrivelse	Materiale:	EN-klasse	Brutto Vægt Kg:
227099200	1722169	Ø 600	Galvaniseret Smedejern	A 50	23
227099220	1722170	Ø 600	Galvaniseret Smedejern	A 50	25
2270 99227	1978788	Ø 600	Galvaniseret Smedejern	A 50	30
2270 99228	2391013	Ø 600	Galvaniseret Smedejern	A 50	31


Ved anvendelse af Jesmig tætningslister, kan der opnås en lugttæthed på 99 % gennem dækslet

Testet iht. norm. DS/EN 124-1, 3:2015 rapportnummer: 2021-0309


2024-10-01

Ø600 JESMIG BRØNDDÆKSEL


T2

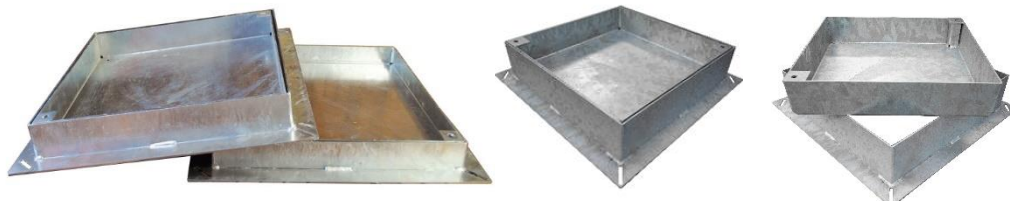


T2-50, T2-70, T2-135-70 og T2-135-105




T2-50



T2-50




T2-70




T2-70




T2-135-70



T2-135-70



T2-135-105

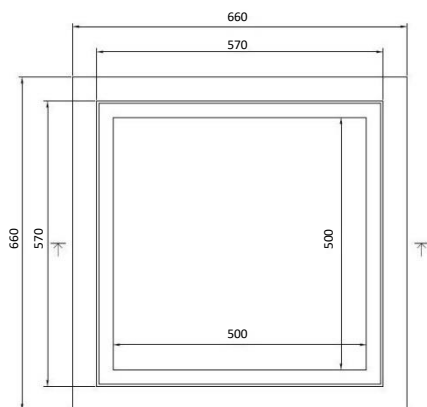

T2-50, T2-70, T2-135-70 og T2-135-105

